

MSI-9600HT

Port-A-Weigh Plus

HI-TORQUE WIRELESS CRANE SCALE



RICE LAKE[®]
WEIGHING SYSTEMS

800-472-6703
www.ricelake.com

MSI-9600HT Port-A-Weigh Plus

HI-TORQUE WIRELESS CRANE SCALE





Heavy Capacity Wireless Overhead Weighing

The MSI-9600HT Hi-Torque Port-A-Weigh Plus crane scale, integrated with ScaleCore technology, has models up to 200,000-pound capacity that captures weight within a +/- 0.2% accuracy.

The MSI-9600HT has a unique configuration designed for heavy capacity coil handling, or other applications, reaching up to 100 tons. A fixed hook is featured for interface compatibility with crane hooks equipped with powered rotation and where high torque conditions exist between the crane hook and load.

The enclosure, made with IP66 marine grade alloy anodized aluminum, features a rear-battery casting with snap-closure—keeping everything weathertight.

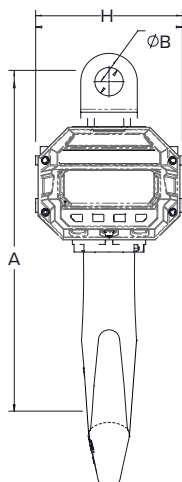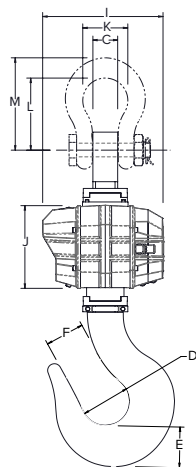


Dimensions 10,000 lb to 70,000 lb Capacity

Part No.	Capacity	A	B	C	D	E	F	H	I	J	K	L	M
214371	10,000 lb (5000 kg)	19.6 in	Ø1.28 in	1.75 in	2.50 in	1.82 in	1.78 in	11.80 in	13.40 in	9.20 in	2.91 in	4.88 in	6.13 in
214370	30,000 lb (15,000 kg)	23.4 in	Ø1.66 in	2.15 in	4.25 in	3.01 in	3.41 in	11.80 in	13.40 in	9.20 in	3.88 in	6.57 in	8.19 in
214369	70,000 lb (35,000 kg)	30.5 in	Ø2.06 in	2.75 in	5.38 in	4.56 in	4.25 in	11.80 in	13.40 in	9.20 in	5.00 in	8.00 in	10.25 in

Dimensions 100,000 lb to 200,000 lb Capacity

Part No.	Capacity	A	B	C	D	E	F	H	I	J	K	L	M
214477	100,000 lb (50,000 kg)	27.9 in	Ø2.32 in	3.10 in	6.00 in	5.06 in	4.75 in	12.00 in	20.90 in	9.20 in	5.75 in	8.88 in	11.28 in
214474	120,000 lb (60,000 kg)	29.5 in	Ø2.32 in	3.10 in	7.00 in	6.00 in	5.75 in	12.00 in	20.90 in	9.20 in	5.75 in	8.88 in	11.28 in
214479	200,000 lb (100,000 kg)	35.4 in	Ø2.81 in	3.75 in	6.81 in	8.59 in	5.88 in	13.30 in	23.00 in	9.20 in	7.25 in	11.88 in	15.00 in

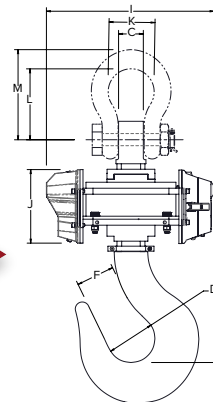

SPECIFICATIONS

ACCURACY:	10,000 to 120,000 lb: ± (0.1% +1 d) of capacity 200,000 lb: ± (0.2% +1 d) of capacity
RESOLUTION:	3,000 to 5,000 d standard (Up to 10,000 d available)
ENCLOSURE:	NEMA Type 4, IP66, marine grade 356 alloy anodized cast aluminum
LIFTING EYE, SHACKLE & HOOK:	Shackle is optional and Crosby® fixed hook provided as standard
DESIGN OVERLOAD:	200% Safe / 500% Ultimate (except where noted)
FUNCTIONS:	Power: Turns unit on or off Zero: Zeros applied load up to 100% of capacity Tare: Tares applied load and displays weight in net Mode F1: Programmable as test, units, net/gross, total and peak hold
DISPLAY:	Six-digit, 1.5 in (38 mm) LED, 3 colors (programmable)
DISPLAYABLE UNITS:	Pounds or kilograms selectable
POWER:	12 Volt rechargeable battery, 115/230 VAC battery charger included
OPERATING TIME:	Up to 75 hours with radio, up to 250 hours without radio
OPERATING TEMPERATURE:	-40 to 140 °F (-40 to 60 °C) Max: -76 to 176 (-60 to 80 °C) Radio may not be reliable below -40 °F (-40 °C) Continuous operation above 140 °F (60 °C) may reduce battery life
CALIBRATION:	Digital
FILTERING:	OFF, L0, HI-1 or HI-2 selectable
RADIO LINK:	802.15.4 at 2.4 GHz, Wi-Fi
RADIO LINK RANGE:	Typically 100 to 300 ft line of sight
WARRANTY:	One-year limited

STANDARD FEATURES

- LED display (red/orange/green) and annunciators
- Top shackle (sold separately)
- 12 volt rechargeable battery and universal 115/230 VAC, 50/60 Hz battery charger (NA plug standard)
- Hi-torque load train designed for use with powered rotation

OPTIONS

(Contact MSI for application consultation)

- Top shackle
- Dual radio capability
- Rugged remote control (control for On/Off, Zero, Tare and other functions)
- Anti-heat shielding for high-temperature applications
- Substitute bottom hook with shackle
- Oversized top or shackle
- Oversized bottom hooks
- Universal direct power supply
- Wi-Fi communication is available for specialty applications
- RF modem install for connectivity to MSI-8000, MSI-8000HD RF, MSI-8004HD RF remote display, TranSend and LaserLight2 remote display
- Typically 100 to 300ft, line of sight; for longer range consult factory
- Low headroom top adaptor
- Audible alarm
- Custom top and bottom interfaces

SALES AND TECHNICAL ASSISTANCE

CORPORATE HEADQUARTERS: Rice Lake, Wisconsin, U.S.
USA: 800-472-6703 | Direct: 715-234-9171 | Fax: 715-234-6967

Canada: +1-800-321-6703 | Mexico: +52 81 8356 5062 | Europe: +39 0536 843418 | International Direct: +1-715-234-9171

RICE LAKE
WEIGHING SYSTEMS
www.ricelake.com