

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

C2032x supersedes B0779x as the standard Uni-7 firmware for the revised PK-260B CPU board.

Procedure to install new Uni-7 firmware. Refer to the *Uni-7 Setup Manual* for complete information.

1. Copy the Uni-7 scale firmware folder "Soft" onto an empty USB memory stick.
 - The folder and files must not be zipped.
 - The "Soft" folder must be the only data on the USB memory stick.
2. With the Uni-7 powered OFF raise the left side access panel.
3. Insert the Memory Stick in to the USB port.
DO NOT REMOVE the USB Memory Stick during the firmware update procedure.
4. Power up the Uni-7, press **ENTER** at the Date/Time confirm screen.
Note: Power up may take several minutes depending on the firmware version.
5. The upper display bar will be red indicating boot up from a USB Memory Stick.
Note: The scale will also be in "European" mode.
6. A warning message "Data Composition Is Different. Please Initialize the Memory" (0114-0000) may be displayed if the current and new firmware versions differ greatly. If this message appears press **OK** and skip to step 8.
7. Press the **MODE** key to enter the Main menu.
8. Enter **495344** and press the **PLU** key to access hidden menu steps.
9. Press the **ADJUST** menu button.
10. Scroll down and select **DOWNLOAD** (page 2/3).
11. At the DOWNLOAD (MAIN) screen press the **MAIN (ALL CLR)** button and press **EXECUTE**.
12. Press **EXEC** to begin clearing the Uni-7 Flash ROM memory.
13. After the flash ROM is cleared, the Uni-7 will return to the DOWNLOAD (MAIN) screen.
14. Press the **USB>MAIN (PRG+IMG)** button.
15. Press the firmware version to be installed. It will be highlighted.
16. Press **EXECUTE**.
17. Screen 15034-0000 "DATABASE VERSION IS DIFFERENT" may be displayed. Press **EXEC** to continue.
18. Press **EXEC** to begin the firmware download.
19. The screen will show the firmware download progress.
Note: The download may take a few minutes to begin and up to 20 minutes to complete. Data transfer may be confirmed by the flashing light on the USB memory stick.
20. When message 15029-0000 is displayed, the firmware download is complete -- power the scale off.
21. Remove the USB Memory Stick.

Procedure to convert to 2020 Nutrition data format. See C2032J item 1h for detailed step by step instructions.

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

PK-260B CPU Board

Firmware C2032x is designed for the revised CPU board PK-260B. **This firmware is not compatible with the previous CPU board PK-260A.** And previous firmware (B0674x, C1991x, etc.) is not compatible with the new PK-260B CPU board.

The two CPU board versions can be easily identified by the expansion memory card slot located on the left side of the Uni-7. See the images below.



SD Memory Cards

The new PK-260B CPU board supports SD memory card sizes 512MB, 1GB, and 2GB (p/n 174110). The maximum SD card memory that can be recognized is 2GB. A larger capacity SD card may be used but only 2GB will be available.

C2032x PK-260B with SD Memory Card Slot



C1991x PK-260A with CF Memory Card Slot

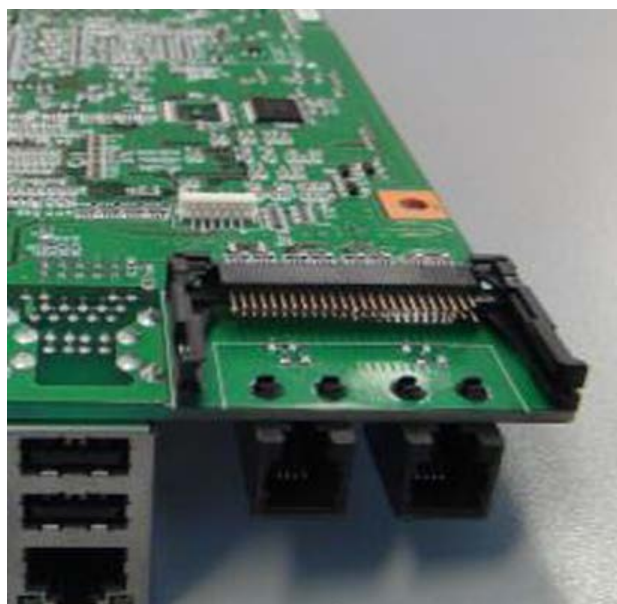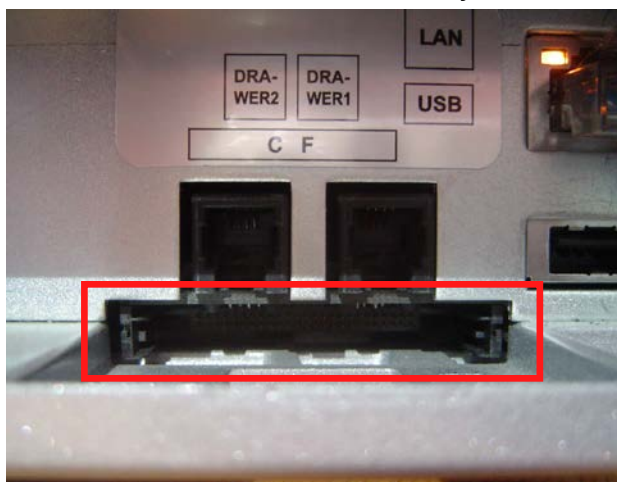

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

Contents

Version C2032K.....	3
Version C2032J	4
Version C2032H	5
Version C2032G	6
Version C2032F	7
Version C2032E.....	7
Version C2032D	8
Version C2032C	8
Version C2032B.....	8
Version C2032A.....	9
Version C2032	9

Version C2032K features & changes [8 November 2019]

Use with SLP-5 **2.40t** or later

Use with SLP-V **3.05g** or later (2020 Nutrition is not supported)

Related programs

Main: C2033J
OS: C2373
BOOT ROM: B0763C
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.1]



Caution

Memory initialization may be required when upgrading to this firmware version. Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

IMPORTANT

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

1. Load the C2032K "Soft" firmware folder on to a compatible USB.
2. Install the USB and power on the Uni-7 scale.
3. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
4. Install C2032K: select USB>MAIN (PRG+IMG) > select C2032K > EXECUTE.
5. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032J)

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

1. Fixed a bug where nutrition text entered at the scale may not be saved properly. Text entered that was one character less than the maximum could have random characters appended at the end.

Version C2032J features & changes [25 October 2019]

Use with SLP-5 **2.40t** or later

Use with SLP-V **3.05g** or later (2020 Nutrition is not supported)

Related programs

Main: C2033H
OS: C2373
BOOT ROM: B0763C
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.1]



Caution

Memory initialization is required when upgrading to this firmware version.

Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

IMPORTANT

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

1. Load the C2032J "Soft" firmware folder on to a compatible USB.
2. Install the USB and power on the Uni-7 scale.
3. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
4. Install C2032J: select USB>MAIN (PRG+IMG) > select C2032J > EXECUTE.
5. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032H)

1. Added support to print the new 2020 Nutrition data.
 - a. Nutrition editing screens (Program menu > Nutrition) are changed to two parts listing the new standard nutrition data fields plus a "free" table that can be used for miscellaneous additional values.
 - Form tab – for standard data fields
 - Free tab – for miscellaneous fields
 - b. All values are converted to text to support decimals, percent symbols, etc.
 - c. When nutrition data is sent from SLP-5 in the old numeric format, it is converted and stored in the new 2020 text format. The appropriate unit is automatically added: g, mg, %, etc.
 - d. The following nutrition data from the old format that are no longer required in the new 2020 Nutrition format are saved as follows.
 - Calories From Fat → Nutr.Free1
 - Protein (%) → Nutr.Free2 (%)
 - Sugars (%) → Nutr.Free3 (%)
 - Vitamin A (%) → Nutr.Free4 (%)
 - Vitamin C (%) → Nutr.Free5 (%)

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

- Sugar Alcohol → Nutr.Free1 (%)
- e. After installing C2032J, it is not possible to receive nutrition data in the old numeric format in to SLP-5.
- f. If SLP-5 is configured for the old nutrition format and nutrition data are requested from a scale with C2032J installed, no data will be received in to SLP-5. There is no error.
- g. SLP-5 can be changed between the old and new 2020 Nutrition format as follows: Open SLP-5 Setup Utility > General > General #2 tab > Enable "Nutrition: USA format (2020)"?
- h. It is not possible to transfer old nutrition data by USB backup to the scale after a firmware update to C2032K. SLP-5 must be used to receive the old nutrition data **before** the update. And then send the nutrition data from SLP-5 after the update. Refer to the following steps.
 - i. Create a full USB backup.
 - ii. Configure SLP-5 for the original nutrition format. See step g. above.
 - iii. Receive all data into SLP-5.
 - iv. Install C2032K or later firmware.
 - v. Clear the scale's memory: Adjust menu > Memory Clear.
 - vi. Reconfigure the scale for USA, etc. as needed.
 - vii. Load the full USB backup. The old style nutrition data will fail to load.
 - viii. Send nutrition data from SLP-5 to the scale.
 - ix. Reconfigure SLP-5 for the 2020 Nutrition format
 - x. Receive the converted nutrition data from the scale. See step g. above.
 - xi. Download updated label formats as needed to print the 2020 Nutrition format.
- 2. Added 2020 Nutrition Print IDs 2C1 to 2C8 and 2E4 to 2ED (705 to 712 and 740 to 749 in SLP-5).
- 3. Converted all original nutrition fields (Print IDs) to text format. This allows the option to print both the original and 2020 Nutrition data and formats during a transition period.

Version C2032H features & changes [10 October 2019]

Use with SLP-5 **2.10n** or later
Use with SLP-V **3.05g** or later

Related programs

Main: C2033G
OS: C2373
BOOT ROM: B0763C
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]



Caution

Memory initialization may be required when upgrading to this firmware version. Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

IMPORTANT

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

1. Load the C2032H "Soft" firmware folder on to a compatible USB.

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

2. Install the USB and power on the Uni-7 scale.
3. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
4. Install C2032H: select USB>MAIN (PRG+IMG) > select C2032H > EXECUTE.
5. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032G)

1. Fixed a bug where the scale would lockup after printing a receipt if the length of Footer 2 was very short.

Version C2032G features & changes [17 July 2019]

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

Related programs

Main:	C2033F
OS:	C2373
BOOT ROM:	B0763C
PRINTER1 FPGA:	B0778

[Firmware Database Structure Version: 2.17.2032.0]



Caution

Memory initialization may be required when upgrading to this firmware version. Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

IMPORTANT

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

1. Load the C2032G "Soft" firmware folder on to a compatible USB.
2. Install the USB and power on the Uni-7 scale.
3. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
4. Install C2032G: select USB>MAIN (PRG+IMG) > select C2032G > EXECUTE.
5. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032F)

1. Fixed a bug where the Uni-7 Bakery model would display an Authentication error during power up. Changed to skip the comms check with A/B board that is not included in the Bakery version.
2. Fixed a bug where the Serial Number printed on the label as zero and did not increment.

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

Version C2032F features & changes [27 July 2018]

Use with SLP-5 **2.10n** or later
Use with SLP-V **3.05g** or later

Related programs

OS: **C2373**
BOOT ROM: B0763C
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]



Caution

Memory initialization is required when upgrading to this firmware version. Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

The following lists the main changes from the previous version (C2032E)

1. Updated the operating system (OS) to prevent Telnet communication. Response to a Telnet inquiry was removed for network security reasons.
 - a. The updated C2373 OS must be loaded by USB REBOOT MODE (rebooting the machine with a USB memory stick inserted containing the C2032F firmware "Soft" folder). This is necessary to update the OS along with the main firmware.
 - b. Confirm the OS has been updated to version C2373 after the firmware download procedure is completed: Adjust menu > Firmware Detail.
 - c. A Memory Clear must be performed after installing the firmware to activate the Telnet block.

Known Issue:

- The serial number prints on the label as zero and does not increment in setup.

Version C2032E features & changes [22 May 2017]

Use with SLP-5 **2.10n** or later
Use with SLP-V **3.05g** or later

Related programs

OS: **B0762D**
BOOT ROM: **B0763C**
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]



Caution

Memory initialization is required when upgrading to this firmware version. Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032D** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab).

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

The following lists the main changes from the previous version (C2032D)

1. Modified to display the Firmware Details in Adjust menu without entering the service password.
2. Fixed a potential problem where the Flash ROM could be corrupted if the scale was powered off while the Sales Mode was being changed.
3. Fixed a bug where change was not calculated correctly in Cash Register mode when no receipt was printed.

Version C2032D features & changes [16 November 2016]

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

Related programs

OS: B0762C

BOOT ROM: B0763B

PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032C)

1. Fixed a bug that caused very slow Master-Satellite communication when the IP Address range was set as 192.168.0.xxx.

Known Issue:

- There is a small delay between labels when the scale is in auto-print mode.

Version C2032C features & changes [10 August 2016]

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

Related programs

OS: B0762C

BOOT ROM: B0763B

PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032B)

1. Fixed a bug where the price rounding calculation was incorrect for Unit Price -\$ and Unit Price -% markdown amounts when the scale was set for single-range.
2. Removed Bootrom firmware program from the Soft folder to prevent conflicts and compatibility issues since the program is loaded by default on the CPU board.

Version C2032B features & changes [27 May 2016]

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

Related programs

OS: B0762C
BOOT ROM: **B0763B**
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032A)

1. Changed the range for brightness of the LCD display to 15 - 63 (Adjust menu > Display Check). The maximum value is 63 but the display brightness will not exceed 25.

Version C2032A features & changes [8 April 2016]

Use with SLP-5 **2.10n** or later
Use with SLP-V **3.05g** or later

Related programs

OS: **B0762C**
BOOT ROM: B0763A
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032)

1. Changed default brightness of the LCD display from 50 to 25 (Adjust menu > Display Check). The maximum value is 63 but the display brightness will not exceed 50.
CAUTION: Do Not enter a value of "0" (zero) for the Operator Side display. This will blank the display. The only recovery is to reference another Uni-5/7 scale and press the blank touchscreen accordingly to set the display brightness between 1 and 63.

Version C2032 features & changes [8 January 2016]

Use with SLP-5 **2.10n** or later
Use with SLP-V **3.05g** or later

Related programs

OS: B0762B
BOOT ROM: B0763A
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (B0674R/C1991D)

1. This is the initial release of C2032 for the updated PK-260B CPU board.
2. New firmware 2032 is based on previous firmware B0674R/C1991D. Refer to the Release Notes for details (Uni-7_B0674x_Release_Notes-R.pdf).
3. Previous firmware for the original PK-260A CPU board will not be recognized or listed in the Firmware Download menu (Adjust menu > Download).

C2032x MAIN FIRMWARE RELEASE NOTES
Uni-7 Series with PK-260B CPU Board

4. Data may be transferred from Uni-7 scales with previous firmware and CPU boards by USB backup.
5. Added support for SD memory card available on new CPU board PK-260B.

**** REFERENCE: Uni-7 Firmware Up to C1991D ****

Version C1991D features & changes [8 January 2016]

Use with SLP-5 **2.10n** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)

[Firmware Database Structure Version: 2.17.1991.0]



Caution

Memory initialization may be required when upgrading to this firmware version.

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991A**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear)

The following lists the main changes from the previous version (C1991C)

1. Modified operation to change the total price of a Fixed Price item set for markdown for when the quantity is changed. This works for both PLU and Campaign markdowns.
 - a. This was done by allowing the following discount methods to also work with a Fixed Price item.
 - 4: Special Unit Price
 - 5: - \$ U/P
 - 6: - % U/P
 - b. Price change by quantity also works for @/for price calculation. For any partial values the price will round up, the same as with standard prices.

Example:

- PLU = Fixed Price
- Quantity = 1
- Price = \$6.00
- Markdown = -\$2.00
- Total Price = \$4.00

Change to Quantity = 2

- Price = \$12.00
- Markdown = -\$4.00
- Total Price = \$8.00

Version C1991C features & changes [15 December 2015]

Use with SLP-5 **2.10n** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)

[Firmware Database Structure Version: 2.17.1991.0]



Caution

Memory initialization may be required when upgrading to this firmware version.

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991A**. Due to changes in the memory structure,

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

after firmware installation a standard memory clear will be necessary: **Master Data Clear** & **System Data Init.** (Adjust menu, Memory Clear)

The following lists the main changes from the previous version (C1991B)

1. Added Serial Number (241) to the list of items available in Custom Barcode (Setup menu).

Version C1991B features & changes [7 June 2015]

Use with SLP-5 **2.10i** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)

[Firmware Database Structure Version: 2.17.1991.0]



Caution

Memory initialization is required when upgrading to this firmware version.

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x or C1991A**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** & **System Data Init.** (Adjust menu, Memory Clear)

The following lists the main changes from the previous version (C1991A)

1. Added a "Markup Ratio" setting to the Frequent Shopper menu (Setup menu). This is applicable for Cost+10% or similar customers.

Notes:

- a. The Total Price markup calculation is: $\text{Total Price} + (\text{Total Price} \times \text{Markup Ratio}[\%]) - 0.0049$.
 - b. Round any one hundredths of a penny [third digit after the decimal] 0.0050 and higher to the next higher penny, 0.0049 or lower to the next lower penny.
 - c. The following examples show the markup and rounding for 10%.
 - i. Total Price is \$3.00
 - $3.00 + (3.00 \times 0.1) - 0.0049 = 3.2951$
 - Round UP to \$3.30
 - ii. Total Price is \$2.09
 - $2.09 + (2.09 \times 0.1) - 0.0049 = 2.2941$
 - Round DOWN to \$2.29
 - d. Four prices are available for Weighed items: the original price (cost) and the +10% markup price (consumer price) for both Total Price and Unit Price. Two prices are available for Fixed Price items: the original price (cost) and the 10% markup price (consumer price) for Total Price.
 - e. For Weighed items the markup Unit Price is calculated based on the weight.
 - f. The original price prints in the barcode. The POS calculates the markup as the consumer price.
 - g. Campaign PLUs designated as either Unit Price (Weighed items) or Fixed Price (Fixed Price items) support the Markup Ratio.
 - h. The Markup Ratio is available as 0% (default) to 99%.
2. Added two Print ID fields:
 - a. 256 (598 in SLP-5): +10% Total Price
 - b. 257 (599 in SLP-5): +10% Unit Price (calculated from dividing +10% Total Price by weight)
 3. SLP-V and SLP-5 must be updated to support the two new Print ID fields. The new Print IDs are added as follows:

C2032x MAIN FIRMWARE RELEASE NOTES
Uni-7 Series with PK-260B CPU Board

- a. Open SLP-V or SLP-5 Setup Utility program.
- b. From the Configuration menu, select **General Settings**.
- c. Select the **Supported Functions** tab.
- d. In the General Operations window, check **Advanced Configuration Setting**, click **OK**.
- e. Close and reopen the Setup Utility program.
- f. From the Configuration menu, select **Label Format**.
- g. Double click "Uni-5/Uni-7".
- h. In the Label Format Data window click the **Print ID Setup** button.
- i. Click the **Add** (SLP-V), **New** (SLP-5) button
- j. Enter the following settings for the new Total Price +10% field:
 - i. Name = Total Price +10%
 - ii. Short Name = T.P. +10%
 - iii. Code = 598
 - iv. Special Meaning = None
 - v. Unit Type = Numeric
 - vi. Click **OK**.
- k. Enter the following settings for the new Unit Price +10% field:
 - i. Name = Unit Price +10%
 - ii. Short Name = U.P. +10%
 - iii. Code = 599
 - iv. Special Meaning = None
 - v. Unit Type = Numeric
 - vi. Click **OK**.
- l. Click the **Exit** button, click the **Save** button, Click the **Exit** button.
- m. Close the Setup Utility program.



Weighted PLU



Fixed Price PLU

C2032x MAIN FIRMWARE RELEASE NOTES
Uni-7 Series with PK-260B CPU Board

The screenshot shows the 'Edit Print ID' dialog box with the following fields: Name (Total Price +10%), Short Name (T.P. +10%), Code (598), Special Meaning (None), and Unit Type (Numeric). The OK and Cancel buttons are at the bottom.

SLP-V Total Price +10%

The screenshot shows the 'Edit Print ID' dialog box with the following fields: Name (Unit Price +10%), Short Name (U.P. +10%), Code (599), Special Meaning (None), and Unit Type (Numeric). The OK and Cancel buttons are at the bottom.

SLP-V Unit Price +10%

Version C1991A features & changes [21 May 2015]

Use with SLP-5 **2.10i** or later (**strongly recommended** for compatibility)
Use with SLP-V **3.05r** or later (**strongly recommended** for compatibility)

[Firmware Database Structure Version: 2.17.1991.0]



Caution

Memory initialization is required when upgrading to this firmware version.

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** & **System Data Init.** (Adjust menu, Memory Clear)

The following lists the main changes from the previous version (C1991)

1. Added GS1 Databar format to the custom barcode.
 - a. Added GTIN Print ID 258 (600 in SLP-5). Set "258: GTIN" at the Custom Barcode, and set "GS1 EXPANDED" as the ID for "Custom Barcode". Then set the custom barcode number to print it.
 - b. Variable length FNC is not supported therefore the number of digits for Price, Weight, etc. must be assigned by the AI code.
 - c. Up to 11 levels of GS1 Expanded Stacked may be printed. The OCR printed under the barcode will automatically line feed to print in the proper position based on the length of the OCR. If the number of layers exceeds eleven (11) the OCR will print but the barcode will be blank.
 - d. The following field selections are added to the Custom Barcode:
 - i. C/D unit for GTIN (Check Digit Calculation unit for 13-digit GTIN)
 - ii. GTIN unit (captured from the left)
 - GTIN = 13-digit POS Code + C/D to make 14 digits.
 - 13 digits are from the PLU barcode and the C/D is calculated by Modulus 10 formula which is the standard calculation used for EAN.

C2032x MAIN FIRMWARE RELEASE NOTES

Uni-7 Series with PK-260B CPU Board

2. Added the ability to print up to a 6-digit serial number on standard labels: Setup menu > Operation Setting > Serial tab.
 - a. The following parameters are available.
 - i. Start Number. Default is 1.
 - ii. End number. Default is 999999.
 - iii. Error Roll Back.
 - No – Increment the serial number even if an error occurred (default).
 - Yes – Do not increment the serial number if an error occurred.
 - iv. Daily Auto Reset.
 - No – Hold the serial number even if the scale is powered off (default).
 - Yes – Reset to the Start number once a day after the scale is powered off.
 - b. Serial number Print ID is 241 (577 in SLP-5).
 - c. When the ending number is reached the serial number restarts at the beginning number.
 - d. If a transaction is deleted by the Void key the serial number does not increment.
 - e. Serial number is added to the following: Custom Barcode, Production Transaction Data, and Subtraction mode.

Version C1991 features & changes [28 November 2014]

Use with SLP-5 **2.10i** or later (strongly recommended for compatibility)
Use with SLP-V **3.05r** or later (strongly recommended for compatibility)
[Firmware Database Structure Version: 2.17.1991.0]



Caution

Memory initialization is required when upgrading to this firmware version.

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear)

The following lists the main changes from the previous version (B0674R)

1. Firmware C1991x is the continuation of Uni-7 firmware B0674x.
2. Modified the Search function to find upper- and lower-case characters.