

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

C2032x supersedes B0779x as the standard Uni-7 firmware for the revised PK-260B CPU board.

#### **Procedure to install new Uni-7 firmware.**

Refer to the *Uni-7 Setup Manual* for complete information.

1. Copy the Uni-7 scale firmware folder "Soft" onto an empty USB memory stick.
  - The folder and files must not be zipped.
  - The "Soft" folder must be the only data on the USB memory stick.
2. With the Uni-7 powered OFF raise the left side access panel.
3. Insert the Memory Stick in to the USB port.  
**DO NOT REMOVE** the USB Memory Stick during the firmware update procedure.
4. Power up the Uni-7, press **ENTER** at the Date/Time confirm screen.  
**Note:** Power up may take several minutes depending on the firmware version.
5. The upper display bar will be red indicating boot up from a USB Memory Stick.  
**Note:** The scale will also be in "European" mode.
6. A memory clear will be required after installing the new firmware if the warning message "Data Composition Is Different. Please Initialize the Memory" (0114-0000) is displayed. This is due to significant differences between the current and new firmware versions. Press **OK** and skip to step 8.
7. Press the **MODE** key to enter the Main menu.
8. Enter **495344** and press the **PLU** key to access hidden menu steps.
9. Press the **ADJUST** menu button.
10. Scroll down and select **DOWNLOAD** (page 2/3).
11. At the DOWNLOAD (MAIN) screen press the **MAIN (ALL CLR)** button and press **EXECUTE**.
12. Press **EXEC** to begin clearing the Uni-7 Flash ROM memory.
13. After the flash ROM is cleared, the Uni-7 will return to the DOWNLOAD (MAIN) screen.
14. Press the **USB>MAIN (PRG+IMG)** button.
15. Press the firmware version to be installed. It will be highlighted.
16. Press **EXECUTE**.
17. Screen 15034-0000 "DATABASE VERSION IS DIFFERENT" may be displayed. Press **EXEC** to continue.
18. Press **EXEC** to begin the firmware download.
19. The screen will show the firmware download progress.  
**Note:** The download may take a few minutes to begin and up to 20 minutes to complete.  
Data transfer may be confirmed by the flashing light on the USB memory stick.
20. When message 15029-0000 is displayed, the firmware download is complete -- power the scale off.
21. Remove the USB Memory Stick.

#### **Procedure to convert to 2020 Nutrition data format.**

See [C2032J item 1h](#) for detailed step by step instructions.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### **PK-260B CPU Board**


Firmware C2032x is designed for the revised CPU board PK-260B. **This firmware is not compatible with the previous CPU board PK-260A.** And previous firmware (B0674x, C1991x, etc.) is not compatible with the new PK-260B CPU board.

The two CPU board versions can be easily identified by the expansion memory card slot located on the left side of the Uni-7. See the images below.




#### **SD Memory Cards**

The new PK-260B CPU board supports SD memory card sizes 512MB, 1GB, and 2GB (p/n 174110). The maximum SD card memory that can be recognized is 2GB. A larger capacity SD card may be used but only 2GB will be available.

C2032x PK-260B with SD Memory Card Slot

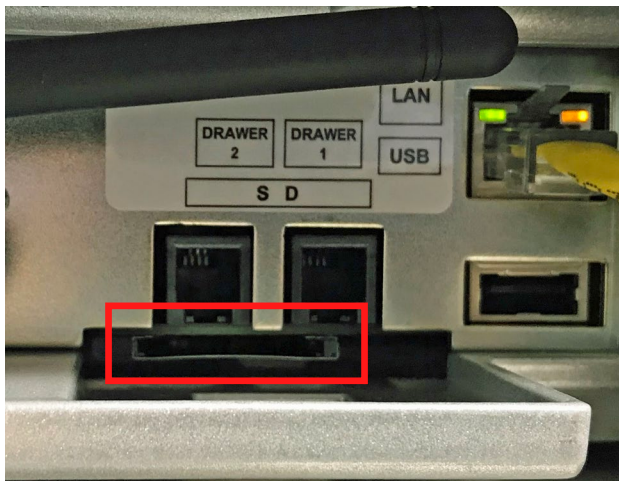

C1991x PK-260A with CF Memory Card Slot

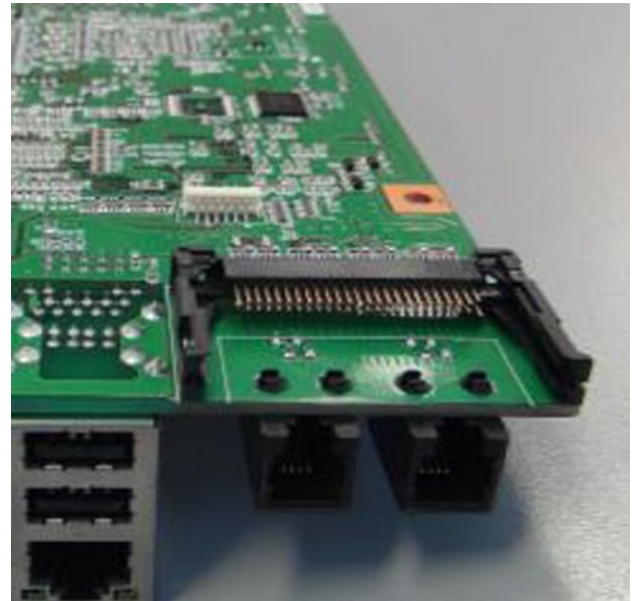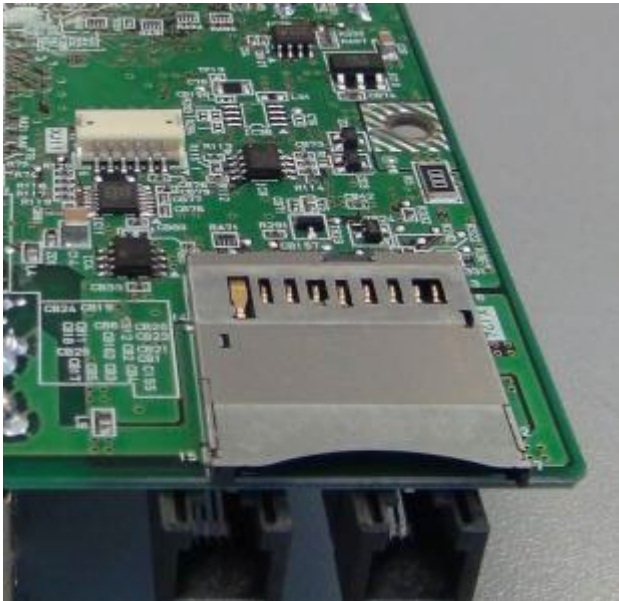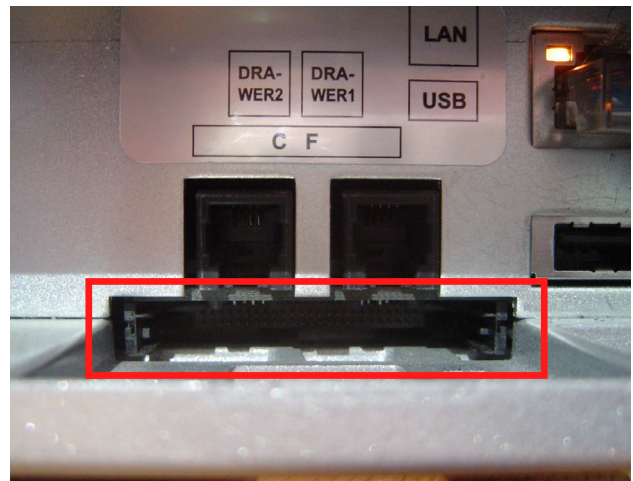

**C2032x MAIN FIRMWARE RELEASE NOTES**  
**Uni-7 Series with PK-260B CPU Board**

**Table of Contents**

|                                                          |    |
|----------------------------------------------------------|----|
| Procedure to install new Uni-7 firmware.....             | 1  |
| Procedure to convert to 2020 Nutrition data format. .... | 1  |
| PK-260B CPU Board.....                                   | 2  |
| SD Memory Cards .....                                    | 2  |
| Version C2032Y.....                                      | 4  |
| Version C2032X.....                                      | 4  |
| Version C2032W.....                                      | 5  |
| Version C2032V.....                                      | 6  |
| Version C2032U.....                                      | 6  |
| Version C2032T.....                                      | 6  |
| Version C2032S.....                                      | 7  |
| Version C2032R.....                                      | 8  |
| Version C2032P.....                                      | 9  |
| Version C2032N.....                                      | 9  |
| Version C2032M.....                                      | 10 |
| Version C2032L.....                                      | 10 |
| Version C2032K.....                                      | 11 |
| Version C2032J.....                                      | 11 |
| Version C2032H.....                                      | 13 |
| Version C2032G.....                                      | 14 |
| Version C2032F.....                                      | 14 |
| Version C2032E.....                                      | 15 |
| Version C2032D.....                                      | 16 |
| Version C2032C.....                                      | 16 |
| Version C2032B.....                                      | 16 |
| Version C2032A.....                                      | 17 |
| Version C2032.....                                       | 17 |
| Version C1991D.....                                      | 18 |
| Version C1991C.....                                      | 18 |
| Version C1991B.....                                      | 19 |
| Version C1991A.....                                      | 21 |
| Version C1991.....                                       | 22 |

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### Version C2032Y

Release Date: September 2025

-----

Use with SLP-5 **2.60** or later ([strongly recommended](#) for compatibility)

#### Related programs

Main: **C2033W**  
OS: C2573  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032R** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.2]

#### **IMPORTANT:**

If updating firmware older than C2032W or if the OS has not been updated to C2573, the following procedure is required. OS C2573 disables Telnet replies for security purposes and fixes an issue with VxWorks Debug mode.

- A. Load the C2032Y "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032Y: select USB>MAIN (PRG+IMG) > select C2032W > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2573 (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032X)

1. Added support for WPA2 TKIP encryption when the "SX" option is selected on the WiFi setup screen (Setup menu → Machine No.). "SX" must be selected when the Silex SX-590 wireless card (white antenna) is installed.
2. Fixed a bug where the SX wireless card could not connect through a gateway router to a WAN (wide area network). The SX-590 configuration is changed to "Fixed MAC Address Mode" where the scale's MAC address is registered on the wireless card.
3. Fixed various messages for improved clarity and grammar.

#### Version C2032X

Release Date: February 2025

-----

Use with SLP-5 **2.40t** or later ([strongly recommended](#) for compatibility)

#### Related programs

Main: **C2033V**  
OS: C2573  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



## Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032R** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.2]

### IMPORTANT:

If updating firmware older than C2032W or if the OS has not been updated to C2573, the following procedure is required. OS C2573 disables Telnet replies for security purposes and fixes an issue with VxWorks Debug mode.

- F. Load the C2032X "Soft" firmware folder on to a compatible USB.
- G. Install the USB and power on the Uni-7 scale.
- H. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- I. Install C2032X: select USB>MAIN (PRG+IMG) > select C2032W > EXECUTE.
- J. After reboot confirm the OS version has been updated to C2573 (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032W)

1. Added barcode format 36: FF CCCCC(/10) (c/p) PPPP (c/d). This format ignores the last digit in the PLU's barcode value – typically a zero. The five digits used from the 14-digit barcode are from 9 to 13.
  - F** Flag, 2 digits
  - C** Product Code, 5 digits (last digit cut off)
  - c/p** Price Check Digit, 1 digit
  - P** Price, 4 digits
  - c/d** Check Digit, 1 digit

### Version C2032W

Release Date: December 1, 2023

Use with SLP-5 **2.40t** or later ([strongly recommended](#) for compatibility)

#### Related programs

Main: **C2033U**  
OS: **C2573**  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



## Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032R** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.2]

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### IMPORTANT:

This firmware loads an updated OS C2573 that disables Telnet replies for security purposes and fixes an issue with VxWorks Debug mode. The following procedure is required.

- A. Load the C2032W "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032W: select USB>MAIN (PRG+IMG) > select C2032W > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2573 (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032T)

1. Updated the OS to version C2573 to disable WDB target agent of debug service of OS (VxWorks) that caused the Uni-7 to fail a PCI compliance scan. This firmware must be loaded by booting off a USB in order to correctly load the updated OS.

See the **IMPORTANT** note above regarding loading this firmware.

A bootable USB is available from Rice Lake (p/n 160906) if the Uni-7 does not recognize standard USB drives.

#### Version C2032V

Release Date: November 24, 2023

-----

C2032V does not include changes that affect the USA.

#### Version C2032U

Release Date: June 11, 2023

-----

C2032U does not include changes that affect the USA.

#### Version C2032T

Release Date: March 30, 2023

-----

Use with SLP-5 **2.40t** or later (**strongly recommended** for compatibility)

#### Related programs

|                |                 |
|----------------|-----------------|
| Main:          | C2033S          |
| OS:            | C2373           |
| BOOT ROM:      | B0763A or later |
| PRINTER1 FPGA: | B0778           |



#### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032R** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.2]

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032T "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032T: select USB>MAIN (PRG+IMG) > select C2032T > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032S)

1. Although the Uni-7 does not force a memory clear, it is required to enable the updated features.
2. Fixed a bug where PLUs set as Fixed Price & Weigh (Fixed UPR) did not accept a fixed weight greater than "999" when sent from ScaleLink Pro 5 or other scale management software. Fixed weight values are now accepted up to "30000" or 30.000 lb. The maximum weight for a Fixed Price PLU remains "999" or 999 ounces.
3. Added "WEIGHT (USA)" [code 0EC] to the Custom Barcode ID list. This supports both single-range and dual-range weighing as illustrated in the examples below.

Examples: a. When the scale is configured for single-range a weight value of 0.01 Lb will print as "00001" in the custom barcode (when the weight value is 5 digits).  
b. When the scale is configured for dual-range a weight value of 15.15 Lb will print as "15150" in the custom barcode

## Version C2032S

Release Date: October 11, 2022

Use with SLP-5 **2.40t** or later (**strongly recommended** for compatibility)

#### Related programs

Main: C2033R  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization is required when upgrading to this firmware version.**

Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032R** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.2]

#### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032S "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032S: select USB>MAIN (PRG+IMG) > select C2032S > EXECUTE.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032R)

1. Added an index to the database to improve communication speed when receiving large Extra Message 1 and Nutrition files.
2. Changed the wording on the WiFi screens for clarify when exiting and saving settings.

## Version C2032R

Release Date: September 1, 2022

Use with SLP-5 **2.40t** or later (strongly recommended for compatibility)

### Related programs

Main: C2033P  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032R "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032R: select USB>MAIN (PRG+IMG) > select C2032R > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032P)

1. Added support for the Silex SX-590 wireless card in addition to the Lantronix WiPort.
  - a. A setting was added to the WiFi setting screen (Setup menu > Machine No.) to select between "WiPort" (default) and "SX".
  - b. The SX-590 card supports the following encryption. Unsupported encryption types are shaded out on the WiFi screen.
    - WEP128
    - WPA PSK (personal) TKIP
    - WPA2 PSK (personal) CCMP
  - c. The SX-590 supports both the 2.4 GHZ and 5 GHZ frequency band, unlike the WiPort that supports only 2.4 GHZ.
  - d. The SX-590 supports 802.11a/b/g/n/ac (1x1) compared to the WiPort that only works with 802.11 b/g.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

- e. For identification purposes, scales with the Silex SX-590 installed from the factory use a white antenna.

## Version C2032P

Release Date: November 11, 2020

Use with SLP-5 **2.40t** or later (**strongly recommended** for compatibility)

### Related programs

Main: C2033N  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

### **IMPORTANT:**

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032P "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032P: select USB>MAIN (PRG+IMG) > select C2032P > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032N)

1. Fixed a bug where the Feed key stopped working after the first receipt was printed while the scale was configured for CR mode.

## Version C2032N

Release Date: February 3, 2020

C2032N does not include changes that affect the USA.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### Version C2032M

Release Date: 7 May 2020

-----

Use with SLP-5 **2.40t** or later (strongly recommended for compatibility)

##### Related programs

Main: C2033L  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

#### **IMPORTANT:**

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032M "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032M: select USB>MAIN (PRG+IMG) > select C2032M > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032L)

1. Fixed a bug where the last digit of the Date did not print if the character pitch was set as zero (0).

#### Version C2032L

Release Date: February 10, 2020

-----

Use with SLP-5 **2.40t** or later (strongly recommended for compatibility)

##### Related programs

Main: C2033K  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032L "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032L: select USB>MAIN (PRG+IMG) > select C2032L > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032K)

1. Fixed a bug where extra labels could intermittently print for Fixed Price PLUs when the scale was in Auto print mode.

#### Version C2032K

Release Date: November 8, 2019

-----

Use with SLP-5 **2.40t** or later (strongly recommended for compatibility)

#### Related programs

Main: C2033J  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



#### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

#### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032K "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032K: select USB>MAIN (PRG+IMG) > select C2032K > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032J)

1. Fixed a bug where nutrition text entered at the scale may not be saved properly. Text entered that was one character less than the maximum could have random characters appended at the end.

#### Version C2032J

Release Date: October 25, 2019

-----

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

Use with SLP-5 **2.40t** or later (strongly recommended for compatibility)

#### Related programs

Main: C2033H  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization is required when upgrading to this firmware version.**

Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032H** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.1]

### IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032J "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032J: select USB>MAIN (PRG+IMG) > select C2032J > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032H)

1. Added support to print the new 2020 Nutrition data.
  - a. Nutrition editing screens (Program menu > Nutrition) are changed to two parts listing the new standard nutrition data fields plus a "free" table that can be used for miscellaneous additional values.
    - Form tab – for standard data fields
    - Free tab – for miscellaneous fields
  - b. All values are converted to text to support decimals, percent symbols, etc.
  - c. When nutrition data is sent from SLP-5 in the old numeric format, it is converted and stored in the new 2020 text format. The appropriate unit is automatically added: g, mg, %, etc.
  - d. The following nutrition data from the old format that are no longer required in the new 2020 Nutrition format are saved as follows.
    - Calories From Fat → Nutr.Free1
    - Protein (%) → Nutr.Free2 (%)
    - Sugars (%) → Nutr.Free3 (%)
    - Vitamin A (%) → Nutr.Free4 (%)
    - Vitamin C (%) → Nutr.Free5 (%)
    - Sugar Alcohol → Nutr.Free1 (%)
  - e. After installing C2032J, it is not possible to receive nutrition data in the old numeric format in to SLP-5.
  - f. If SLP-5 is configured for the old nutrition format and nutrition data are requested from a scale with C2032J installed, no data will be received in to SLP-5. There is no error.
  - g. SLP-5 can be changed between the old and new 2020 Nutrition format as follows: Open SLP-5 Setup Utility > General > General #2 tab > Enable "Nutrition: USA format (2020)"?

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

- h. It is not possible to transfer old nutrition data by USB backup to the scale after a firmware update to C2032K. SLP-5 must be used to receive the old nutrition data **before** the update. And then send the nutrition data from SLP-5 after the update. Refer to the following steps.
  - i. Create a full USB backup.
  - ii. Configure SLP-5 for the original nutrition format. See step g. above.
  - iii. Receive all data into SLP-5.
  - iv. Install C2032K or later firmware.
  - v. Clear the scale's memory: Adjust menu > Memory Clear.
  - vi. Reconfigure the scale for USA, etc. as needed.
  - vii. Load the full USB backup. The old-style nutrition data will fail to load.
  - viii. Send nutrition data from SLP-5 to the scale.
  - ix. Reconfigure SLP-5 for the 2020 Nutrition format
  - x. Receive the converted nutrition data from the scale. See step g. above.
  - xi. Download updated label formats as needed to print the 2020 Nutrition format.
2. Added 2020 Nutrition Print IDs 2C1 to 2C8 and 2E4 to 2ED (705 to 712 and 740 to 749 in SLP-5).
3. Converted all original nutrition fields (Print IDs) to text format. This allows the option to print both the original and 2020 Nutrition data and formats during a transition period.

## Version C2032H

Release Date: October 10, 2019

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

### Related programs

Main: C2033G  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



### Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.0]

### **IMPORTANT:**

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032H "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032H: select USB>MAIN (PRG+IMG) > select C2032H > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032G)

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

1. Fixed a bug where the scale would lockup after printing a receipt if the length of Footer 2 was very short.

## Version C2032G

Release Date: July 17, 2019

-----  
Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

### Related programs

Main: C2033F  
OS: C2373  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



## Caution

**Memory initialization may be required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.0]

## IMPORTANT:

This firmware loads an updated OS C2373 that disables Telnet replies for security purposes. This was first introduced in C2032F. The following procedure is required.

- A. Load the C2032G "Soft" firmware folder on to a compatible USB.
- B. Install the USB and power on the Uni-7 scale.
- C. Clear the old firmware files: Adjust menu > Download > select MAIN (ALL CLEAR).
- D. Install C2032G: select USB>MAIN (PRG+IMG) > select C2032G > EXECUTE.
- E. After reboot confirm the OS version has been updated to C2373 or later (Adjust menu > Firmware Details).

The following lists the main changes from the previous version (C2032F)

1. Fixed a bug where the Uni-7 Bakery model would display an Authentication error during power up. Changed to skip the comms check with A/D board that is not included in the Bakery version.
2. Fixed a bug where the Serial Number printed on the label as zero and did not increment.

## Version C2032F

Release Date: July 27, 2018

-----  
Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

### Related programs

OS: **C2373**  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778



## Caution

**Memory initialization is required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032E** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.0]

The following lists the main changes from the previous version (C2032E)

1. Updated the operating system (OS) to prevent Telnet communication. Response to a Telnet inquiry was removed for network security reasons.
  - a. The updated C2373 OS must be loaded by USB REBOOT MODE (rebooting the machine with a USB memory stick inserted containing the C2032F firmware "Soft" folder). This is necessary to update the OS along with the main firmware.
  - b. Confirm the OS has been updated to version C2373 after the firmware download procedure is completed: Adjust menu > Firmware Detail.
  - c. A Memory Clear must be performed after installing the firmware to activate the Telnet block.

### Known Issue:

- The serial number prints on the label as zero and does not increment in setup.

## Version C2032E

Release Date: May 22, 2017

Use with SLP-5 **2.10n** or later

Use with SLP-V **3.05g** or later

### Related programs

OS: **B0762D**

BOOT ROM: B0763A or later

PRINTER1 FPGA: B0778



## Caution

**Memory initialization is required when upgrading to this firmware version.** Create a USB backup or use SLP-5 Maintenance Utility and SLP-5 to backup the scale before upgrading from firmware **C2032D** or an earlier version. Due to significant changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear** (Adjust menu > Memory Clear) & **System Data Init.** (Setup menu > File Save/Load > Scale Init. tab). [2.17.2032.0]

The following lists the main changes from the previous version (C2032D)

1. Modified to display the Firmware Details in Adjust menu without entering the service password.
2. Fixed a potential problem where the Flash ROM could be corrupted if the scale was powered off while the Sales Mode was being changed.
3. Fixed a bug where change was not calculated correctly in Cash Register mode when no receipt was printed.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

#### Version C2032D

Release Date: November 16, 2016

-----

Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

##### Related programs

OS: B0762C  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032C)

1. Fixed a bug that caused very slow Master-Satellite communication when the IP Address range was set as 192.168.0.xxx.

##### **Known Issue:**

- There is a small delay between labels when the scale is in auto-print mode.

#### Version C2032C

Release Date: August 10, 2016

-----

Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

##### Related programs

OS: B0762C  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032B)

1. Fixed a bug where the price rounding calculation was incorrect for Unit Price -\$ and Unit Price -% markdown amounts when the scale was set for single-range.
2. Removed Bootrom firmware program from the Soft folder to prevent conflicts and compatibility issues since the program is loaded by default on the CPU board.

#### Version C2032B

Release Date: May 27, 2016

-----

Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

##### Related programs

OS: B0762C  
BOOT ROM: B0763A or later  
PRINTER1 FPGA: B0778

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032A)

1. Changed the range for brightness of the LCD display to 15 - 63 (Adjust menu > Display Check). The maximum value is 63 but the display brightness will not exceed 25.

### Version C2032A

Release Date: April 8, 2016

-----  
Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

#### Related programs

OS: **B0762C**  
BOOT ROM: B0763A  
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (C2032)

1. Changed default brightness of the LCD display from 50 to 25 (Adjust menu > Display Check). The maximum value is 63 but the display brightness will not exceed 50.  
**CAUTION:** Do Not enter a value of "0" (zero) for the Operator Side display. This will blank the display. The only recovery is to reference another Uni-5/7 scale and press the blank touchscreen accordingly to set the display brightness between 1 and 63.

### Version C2032

Release Date: January 8, 2016

-----  
Use with SLP-5 **2.10n** or later  
Use with SLP-V **3.05g** or later

#### Related programs

OS: B0762B  
BOOT ROM: B0763A  
PRINTER1 FPGA: B0778

[Firmware Database Structure Version: 2.17.2032.0]

The following lists the main changes from the previous version (B0674R/C1991D)

1. This is the initial release of C2032 for the updated PK-260B CPU board.
2. New firmware 2032 is based on previous firmware B0674R/C1991D. Refer to the Release Notes for details (Uni-7\_B0674x\_Release\_Notes-R.pdf).
3. Previous firmware for the original PK-260A CPU board will not be recognized or listed in the Firmware Download menu (Adjust menu > Download).
4. Data may be transferred from Uni-7 scales with previous firmware and CPU boards by USB backup.
5. Added support for SD memory card available on new CPU board PK-260B.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

**\*\* REFERENCE: Uni-7 Firmware Up to C1991D \*\***

#### Version C1991D

Release Date: January 8, 2016

---

Use with SLP-5 **2.10n** or later ([strongly recommended](#) for compatibility)

Use with SLP-V **3.05r** or later ([strongly recommended](#) for compatibility)



#### Caution

**Memory initialization may be required when upgrading to this firmware version.**

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991A**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear). [2.17.1991.0]

The following lists the main changes from the previous version (C1991C)

1. Modified operation to change the total price of a Fixed Price item set for markdown for when the quantity is changed. This works for both PLU and Campaign markdowns.
  - a. This was done by allowing the following discount methods to also work with a Fixed Price item.
    - 4: Special Unit Price
    - 5: - \$ U/P
    - 6: - % U/P
  - b. Price change by quantity also works for @/for price calculation. For any partial values the price will round up, the same as with standard prices.

Example:

    - PLU = Fixed Price
    - Quantity = 1
    - Price = \$6.00
    - Markdown = -\$2.00
    - Total Price = \$4.00

Change to Quantity = 2

    - Price = \$12.00
    - Markdown = -\$4.00
    - Total Price = \$8.00

#### Version C1991C

Release Date: December 15, 2015

---

Use with SLP-5 **2.10n** or later ([strongly recommended](#) for compatibility)

Use with SLP-V **3.05r** or later ([strongly recommended](#) for compatibility)



#### Caution

**Memory initialization may be required when upgrading to this firmware version.**

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991A**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear). [2.17.1991.0]

The following lists the main changes from the previous version (C1991B)

1. Added Serial Number (241) to the list of items available in Custom Barcode (Setup menu).

## Version C1991B

Release Date: June 7, 2015

Use with SLP-5 **2.10i** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)



### Caution

**Memory initialization is required when upgrading to this firmware version.**

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991A**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear). [2.17.1991.0]

The following lists the main changes from the previous version (C1991A)

1. Added a "Markup Ratio" setting to the Frequent Shopper menu (Setup menu). This is applicable for Cost+10% or similar customers.

#### Notes:

- a. The Total Price markup calculation is:  $\text{Total Price} + (\text{Total Price} \times \text{Markup Ratio}[\%]) - 0.0049$ .
  - b. Round any one hundredths of a penny [third digit after the decimal] 0.0050 and higher to the next higher penny, 0.0049 or lower to the next lower penny.
  - c. The following examples show the markup and rounding for 10%.
    - i. Total Price is \$3.00
      - $3.00 + (3.00 \times 0.1) - 0.0049 = 3.2951$
      - Round UP to \$3.30
    - ii. Total Price is \$2.09
      - $2.09 + (2.09 \times 0.1) - 0.0049 = 2.2941$
      - Round DOWN to \$2.29
  - d. Four prices are available for Weighed items: the original price (cost) and the +10% markup price (consumer price) for both Total Price and Unit Price. Two prices are available for Fixed Price items: the original price (cost) and the 10% markup price (consumer price) for Total Price.
  - e. For Weighed items the markup Unit Price is calculated based on the weight.
  - f. The original price prints in the barcode. The POS calculates the markup as the consumer price.
  - g. Campaign PLUs designated as either Unit Price (Weighed items) or Fixed Price (Fixed Price items) support the Markup Ratio.
  - h. The Markup Ratio is available as 0% (default) to 99%.
2. Added two Print ID fields:
    - a. 256 (598 in SLP-5): +10% Total Price
    - b. 257 (599 in SLP-5): +10% Unit Price (calculated from dividing +10% Total Price by weight)
  3. SLP-V and SLP-5 must be updated to support the two new Print ID fields. The new Print IDs are added as follows:
    - a. Open SLP-V or SLP-5 Setup Utility program.
    - b. From the Configuration menu, select **General Settings**.
    - c. Select the **Supported Functions** tab.
    - d. In the General Operations window, check **Advanced Configuration Setting**, click **OK**.
    - e. Close and reopen the Setup Utility program.

**C2032x MAIN FIRMWARE RELEASE NOTES**  
**Uni-7 Series with PK-260B CPU Board**

- f. From the Configuration menu, select **Label Format**.
- g. Double click "Uni-5/Uni-7".
- h. In the Label Format Data window click the **Print ID Setup** button.
- i. Click the **Add** (SLP-V), **New** (SLP-5) button
- j. Enter the following settings for the new Total Price +10% field:
  - i. Name = Total Price +10%
  - ii. Short Name = T.P. +10%
  - iii. Code = 598
  - iv. Special Meaning = None
  - v. Unit Type = Numeric
  - vi. Click **OK**.
- k. Enter the following settings for the new Unit Price +10% field:
  - i. Name = Unit Price +10%
  - ii. Short Name = U.P. +10%
  - iii. Code = 599
  - iv. Special Meaning = None
  - v. Unit Type = Numeric
  - vi. Click **OK**.
- l. Click the **Exit** button, click the **Save** button, Click the **Exit** button.
- m. Close the Setup Utility program.



Weighted PLU



Fixed Price PLU

**C2032x MAIN FIRMWARE RELEASE NOTES**  
**Uni-7 Series with PK-260B CPU Board**

The screenshot shows the 'Edit Print ID' dialog box. The fields are: Name: Total Price +10%, Short Name: T.P. +10%, Code: 598, Special Meaning: None (dropdown), and Unit Type: Numeric (dropdown). There are OK and Cancel buttons at the bottom.

SLP-V Total Price +10%

The screenshot shows the 'Edit Print ID' dialog box. The fields are: Name: Unit Price +10%, Short Name: U.P. +10%, Code: 599, Special Meaning: None (dropdown), and Unit Type: Numeric (dropdown). There are OK and Cancel buttons at the bottom.

SLP-V Unit Price +10%

**Version C1991A**

Release Date: May 21, 2015

Use with SLP-5 **2.10i** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)



**Caution**

**Memory initialization is required when upgrading to this firmware version.**

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x** or **C1991**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear). [2.17.1991.0]

The following lists the main changes from the previous version (C1991)

1. Added GS1 Databar format to the custom barcode.
  - a. Added GTIN Print ID 258 (600 in SLP-5). Set "258: GTIN" at the Custom Barcode, and set "GS1 EXPANDED" as the ID for "Custom Barcode". Then set the custom barcode number to print it.
  - b. Variable length FNC is not supported therefore the number of digits for Price, Weight, etc. must be assigned by the AI code.
  - c. Up to 11 levels of GS1 Expanded Stacked may be printed. The OCR printed under the barcode will automatically line feed to print in the proper position based on the length of the OCR. If the number of layers exceeds eleven (11) the OCR will print but the barcode will be blank.
  - d. The following field selections are added to the Custom Barcode:
    - i. C/D unit for GTIN (Check Digit Calculation unit for 13-digit GTIN)
    - ii. GTIN unit (captured from the left)
      - GTIN = 13-digit POS Code + C/D to make 14 digits.
      - 13 digits are from the PLU barcode and the C/D is calculated by Modulus 10 formula which is the standard calculation used for EAN.
2. Added the ability to print up to a 6-digit serial number on standard labels: Setup menu > Operation Setting > Serial tab.

## C2032x MAIN FIRMWARE RELEASE NOTES

### Uni-7 Series with PK-260B CPU Board

- a. The following parameters are available.
  - i. Start Number. Default is 1.
  - ii. End number. Default is 999999.
  - iii. Error Roll Back.
    - No – Increment the serial number even if an error occurred (default).
    - Yes – Do not increment the serial number if an error occurred.
  - iv. Daily Auto Reset.
    - No – Hold the serial number even if the scale is powered off (default).
    - Yes – Reset to the Start number once a day after the scale is powered off.
- b. Serial number Print ID is 241 (577 in SLP-5).
- c. When the ending number is reached the serial number restarts at the beginning number.
- d. If a transaction is deleted by the Void key the serial number does not increment.
- e. Serial number is added to the following: Custom Barcode, Production Transaction Data, and Subtraction mode.

## Version C1991

Release Date: November 28, 2014

Use with SLP-5 **2.10i** or later (strongly recommended for compatibility)

Use with SLP-V **3.05r** or later (strongly recommended for compatibility)



### Caution

**Memory initialization is required when upgrading to this firmware version.**

Use SLP-5 / Maintenance Utility or SLP-V / i-Support to backup the scale before upgrading from firmware **B0674x**. Due to changes in the memory structure, after firmware installation a standard memory clear will be necessary: **Master Data Clear & System Data Init.** (Adjust menu, Memory Clear). [2.17.1991.0]

The following lists the main changes from the previous version (B0674R)

1. Firmware C1991x is the continuation of Uni-7 firmware B0674x.
2. Modified the Search function to find upper- and lower-case characters.



© Rice Lake Weighing Systems Specifications subject to change without notice.  
Rice Lake Weighing Systems is an ISO 9001 registered company.

230 W. Coleman St. • Rice Lake, WI 54868 • USA  
U.S. 800-472-6703 • Canada/Mexico 800-321-6703 • International 715-234-9171 • Europe +31 (0)26 472 1319

[www.ricelake.com/retail](http://www.ricelake.com/retail)

[www.ricelake.mx](http://www.ricelake.mx)

[www.ricelake.eu](http://www.ricelake.eu)

[www.ricelake.co.in](http://www.ricelake.co.in)